




Lenovo IdeaPad Yoga 11S Battery Replacement

In this guide, you will learn how to get to the battery of your IdeaPad Yoga 11S.

Written By: Landon Epps

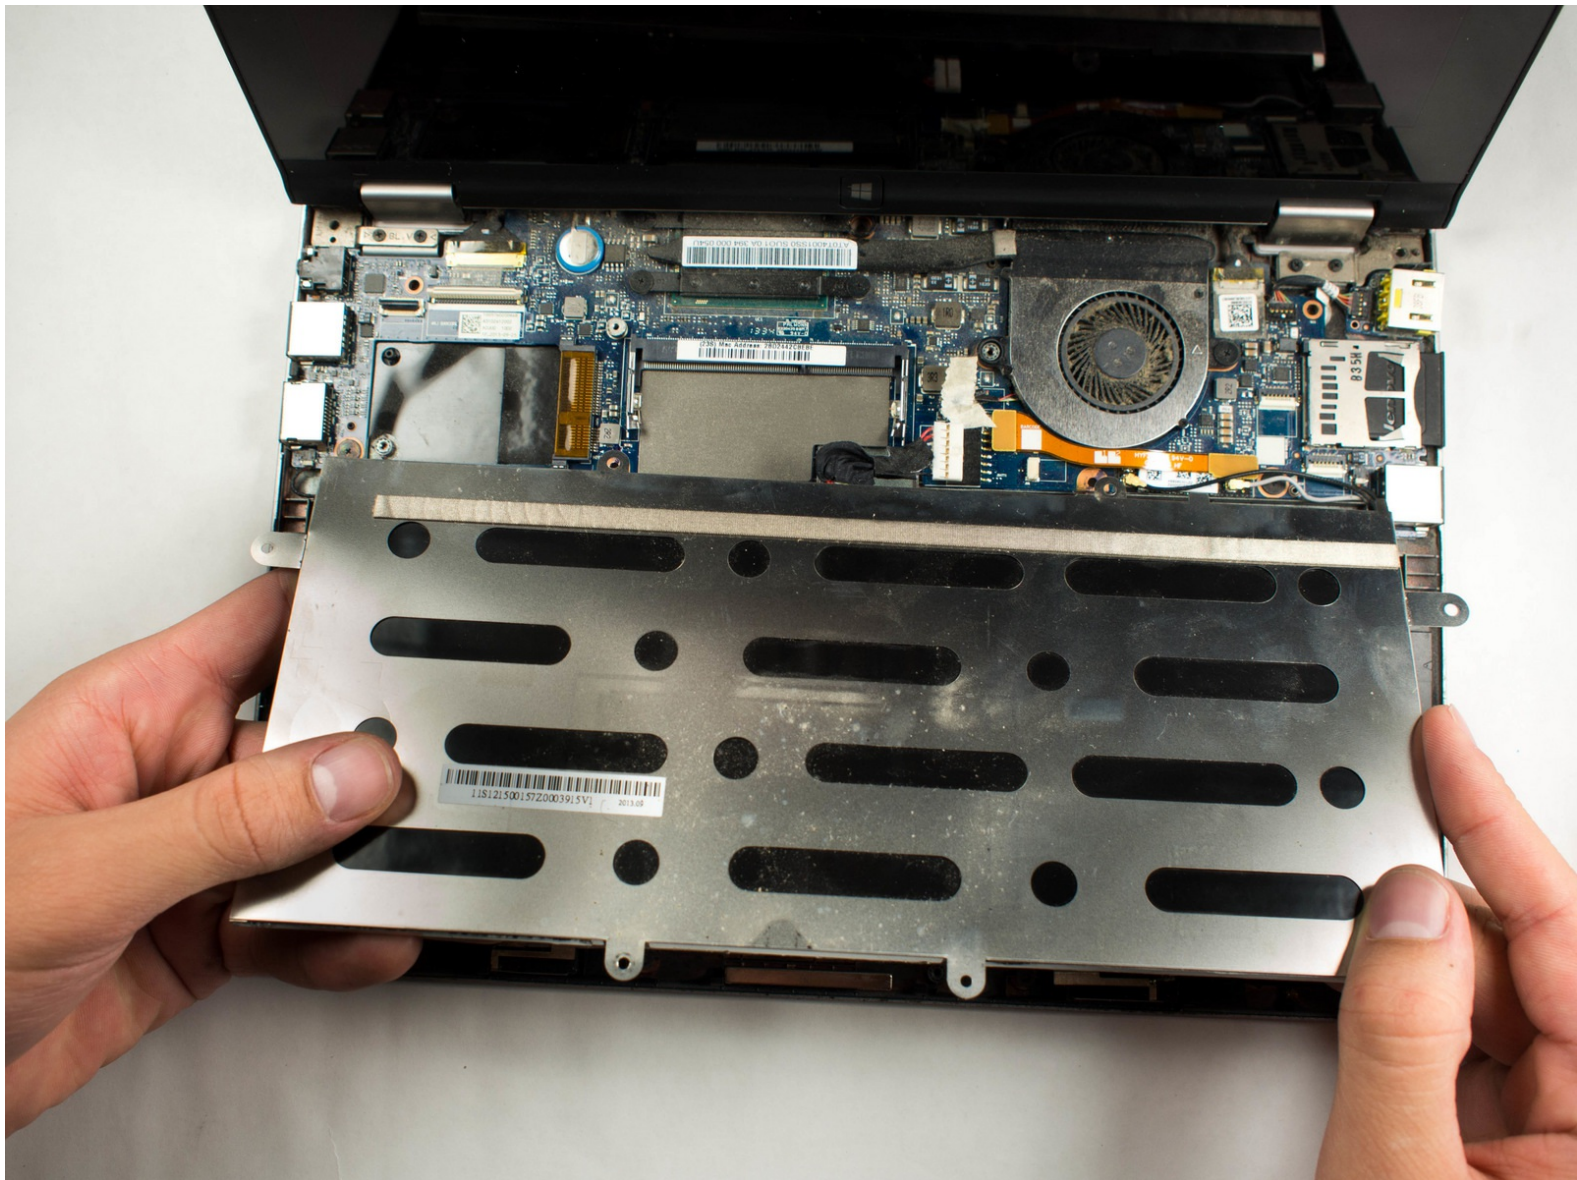

INTRODUCTION



The battery is located directly underneath the top assembly. The RAM module is located above the battery cable, so the RAM module needs to be removed first.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Top Assembly

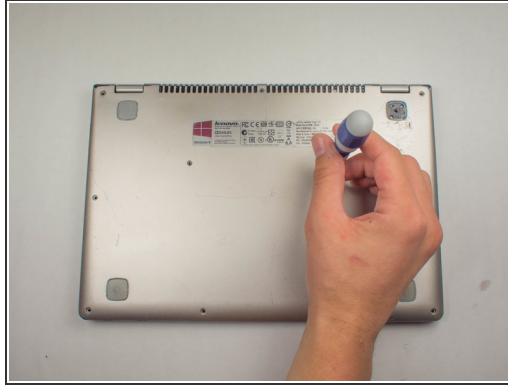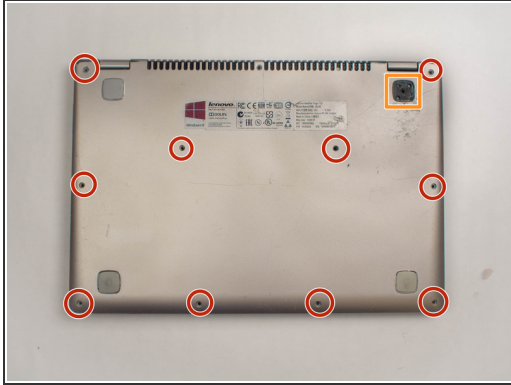

⚠ Remember to power off the device before removing any parts.

- Position the laptop so that the bottom enclosure is facing upward.
- Locate the ten 1.9mm screws holding the bottom enclosure in place.
- Use a Phillips #0 Screwdriver to remove all of the screws.
- Under the rubber pads, there can be screws as well.

Step 2 — Remove Keyboard




- Remove the keyboard starting at the top
- Remove the ribbon cable and then fully remove the keyboard

Step 3




- Remove the 2 screws holding down the top

Step 4

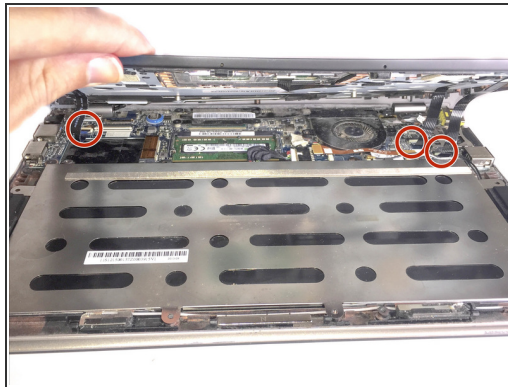


- Position the device where it sits on the bottom encasing with the display open.
- Grab the front edge of the top assembly and lift it up carefully.
- ⚠ There are three ribbon cables that attach the top assembly to the motherboard. Lift carefully to avoid damaging them.
- Gently slide the three ribbon cables out of their slots.
- Remove the top assembly completely by pulling it off of the device.

Step 5 — RAM

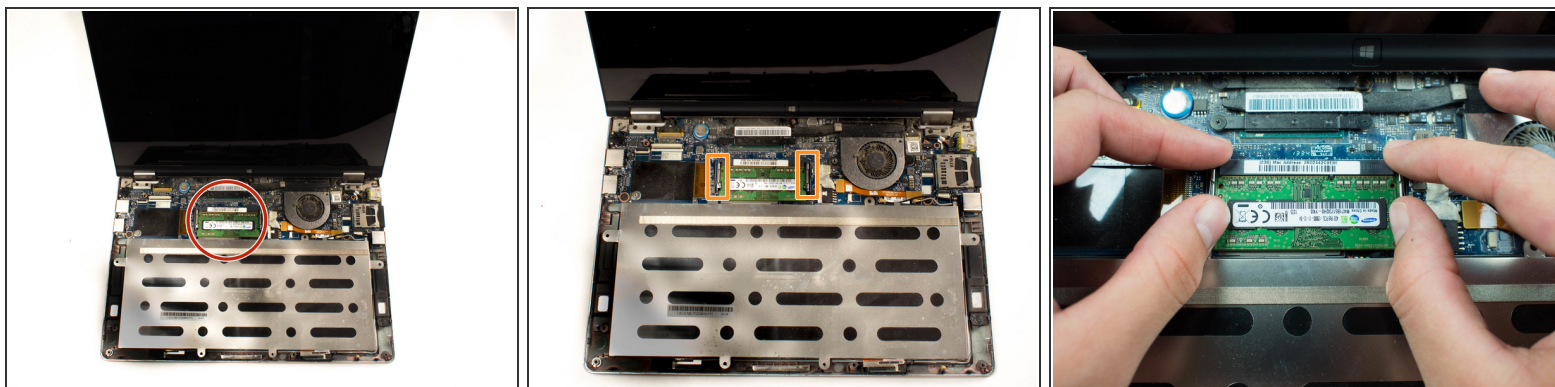


- Locate the RAM module.
- Locate the tabs on both sides of the RAM module
- Rotate both tabs outward at the same time in order to release the RAM module.

Step 6

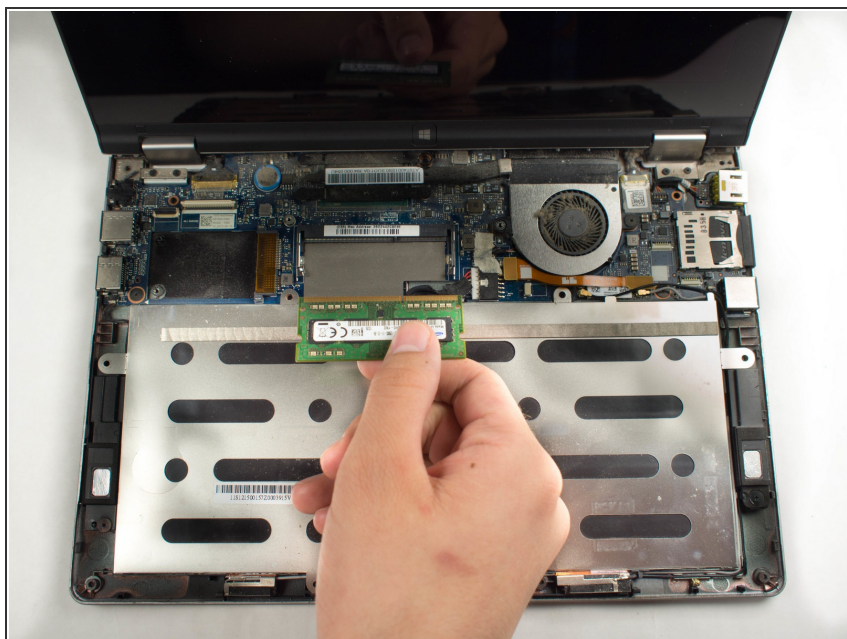


- Grab the RAM module and carefully pull it out from its position.

Step 7 — Battery

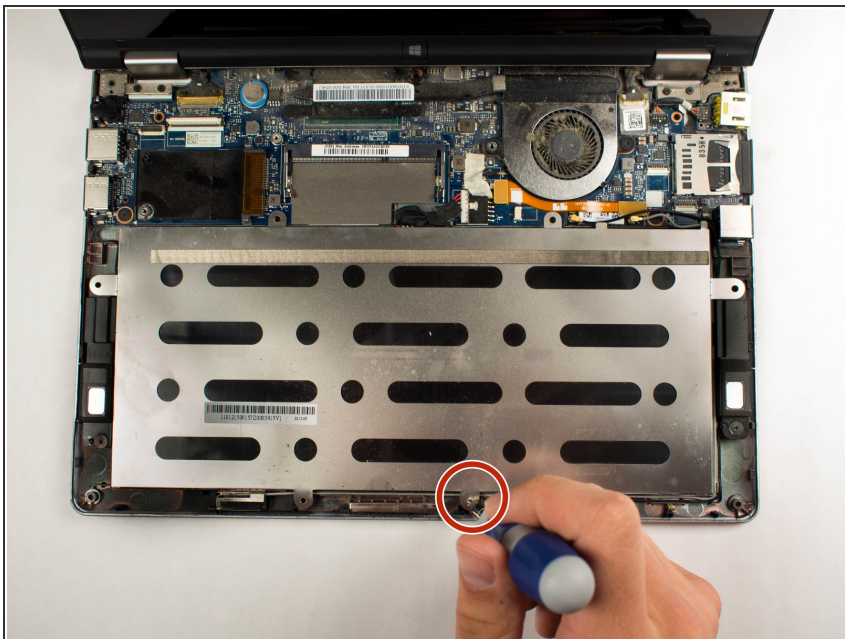


- Locate the 1.9mm screw used to hold down the battery.
- Use a Phillips #0 Screwdriver to remove the screw.

Step 8

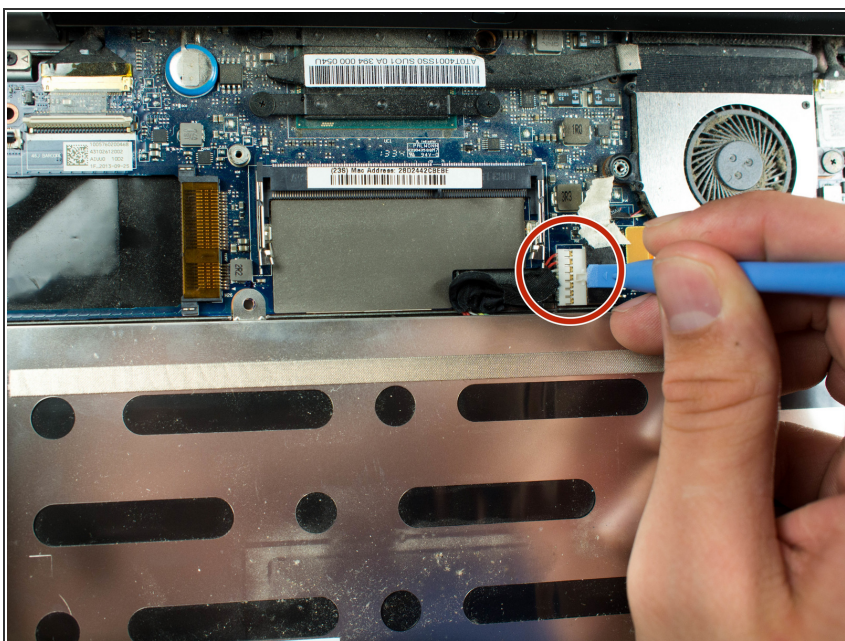

- Find where the wires from the battery are connected to a port on the board.
- Use a plastic opening tool to disconnect the wire encasing from the board.

Step 9

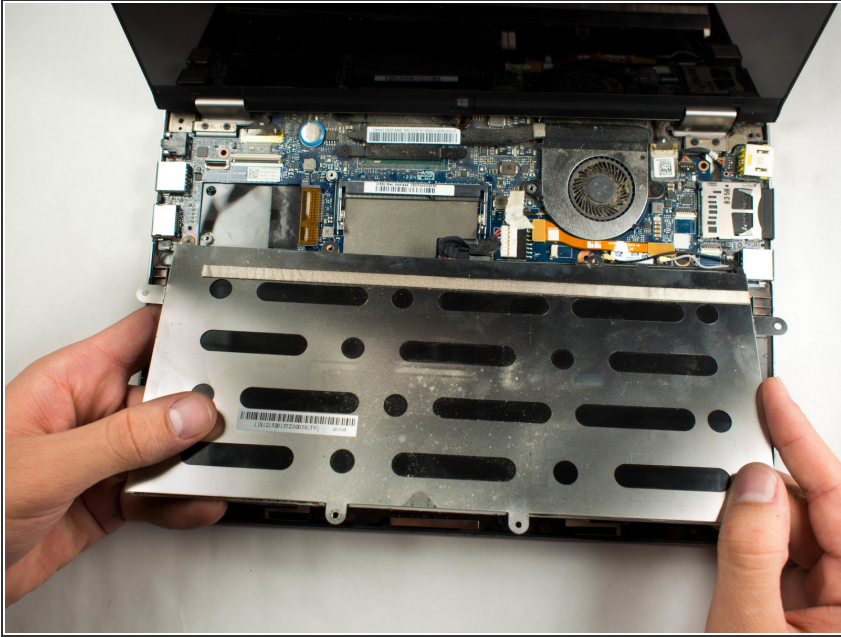

- Now that the battery is disconnected from the device, grab the battery and gently remove it from the device.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-22 09:23:26 AM.